


Mini-XLR 3-pin male to captive screw




XLR 3-pin female




Balanced		Unbalanced	
Pin	Description	Pin	Description
1	External cable (shield/ground)	1	Ground
2	Live ("hot" positive phase)	2	Signal
3	Return signal ("cold" negative phase)	3	Ground

Mini-XLR 4-pin male to captive screw



3.5mm stereo mini jack (solder)

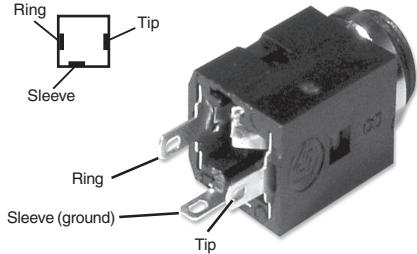

Additional notes:

- To determine the correct pin connections of an XLR connector, refer to the device's existing XLR components.
- For pin numbering, examine the body of the XLR connector.



Extron Electronics, USA
1230 South Lewis Street
Anaheim, CA 92805
USA
714.491.1500
Fax 714.491.1517

Extron Electronics, Europe
Beeldschermweg 6C
3821 AH Amersfoort
The Netherlands
+31.33.453.4040
Fax +31.33.453.4050

Extron Electronics, Asia
135 Joo Seng Road, #04-01
PM Industrial Building
Singapore 368363
+65.6383.4400
Fax +65.6383.4664

Extron Electronics, Japan
Daisan DMJ Building 6F
3-9-1 Kudan Minami
Chiyoda-ku, Tokyo 102-0074 Japan
+81.3.3511.7655
Fax +81.3.3511.7656

68-1058-01
Rev. A
12 04