


BNC Strain Relief Installation Guide

1. Cut the cable to the desired length.
2. Remove the outer jacket as needed to separate the individual coaxial cable lines.
3. For each individual coaxial cable, place a strain relief narrow end first onto the cable, and slide it a few inches down and away from the cable end.




4. Prepare the cable end as usual, then attach and crimp a BNC connector onto the individual coaxial cable.
5. Apply one drop of the provided Loctite® 495 (or comparable) cyanoacrylate glue to the strain relief (for Mini 59 cable) or to the ferrule (for Mini HR cable), as shown below. Avoid skin contact with the glue.

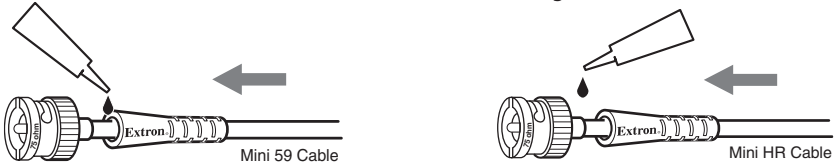

BNC Strain Relief Installation Guide, continued

6. Slide the strain relief up the cable and onto the shaft of the BNC connector.
7. Rotate the strain relief at least a quarter turn to evenly distribute the glue and to seat the strain relief snugly against the BNC barrel.



8. Allow the glue to dry for 1 minute.
9. Repeat steps 3 through 8 for each individual coaxial cable.



Extron Electronics, USA
1230 South Lewis Street
Anaheim, CA 92805
800.633.9876 714.491.1500
FAX 714.491.1517

Extron Electronics, Europe
Beeldschermweg 6C
3821 AH Amersfoort, The Netherlands
+800.3987.6673 +31.33.453.4040
FAX +31.33.453.4050

Extron Electronics, Asia
135 Joo Seng Rd. #04-01
PM Industrial Bldg., Singapore 368363
+800.7339.8766 +65.6383.4400
FAX +65.6383.4664

Extron Electronics, Japan
Kyodo Building, 16 Ichibancho
Chiyoda-ku, Tokyo 102-0082
Japan
+81.3.3511.7655 FAX +81.3.3511.7656

68-431-01
Rev. C
06 08