

ACP 106 EU

AUDIO CONTROL PANEL WITH 6 BUTTONS - EU AND FLEX55




FLEX55

The ACP 106 EU is a configurable audio control panel that interfaces with the DMP 128 Plus audio processors. It provides volume adjustments for mixing and zone control, plus preset or macro recall for room configuration. Multiple ACP Series control panels can be installed around a meeting space and linked together. Each panel can be used for independent control of a specific zone or to adjust audio settings for the entire combined space. The ACP 106 EU features six customizable, soft-touch buttons that are backlit for easy operation in low-light environments. It can be configured easily using Extron DSP Configurator Software. For applications worldwide, the ACP 106 EU is compatible with Flex55 modules, mounting kits, and enclosures, as well as EU junction boxes.


- ▶ Fully customizable button panel integrates easily with an Extron DMP 128 Plus series audio DSP
- ▶ Six customizable, backlit buttons
- ▶ Two ACP ports allow for quick system expansion and upgrades
- ▶ Connects directly to the DMP 128 Plus - No control processor or external power required
- ▶ Use a single audio control panel or link up to eight panels to accommodate a variety of system designs
- ▶ Includes EU wall frame and mounting bracket

Multiple ACP Series button panels can be used as ganged audio control points around a meeting space. Individual spaces can each have an ACP panel that functions independently. When multiple spaces are combined, the ACP Series panels in those spaces can function in parallel, adjusting audio functions for the entire combined space. Since they have the same physical appearance as Extron's broad range of MediaLink controllers, ACP Series panels can be used alongside them throughout a facility while preserving a consistent look and user experience. Buttons can be easily customized using the Custom Button Builder.

APPLICATION DIAGRAM

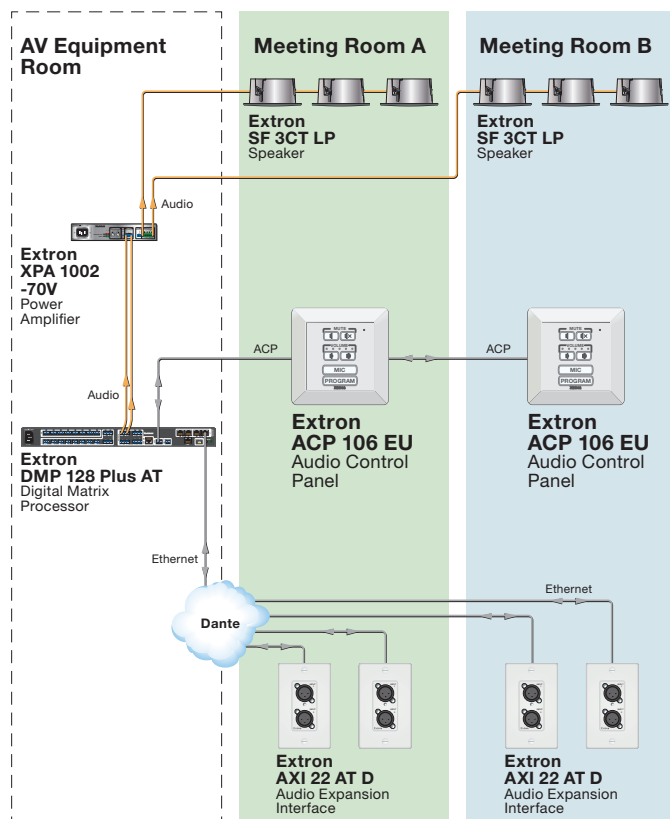

SPECIFICATIONS

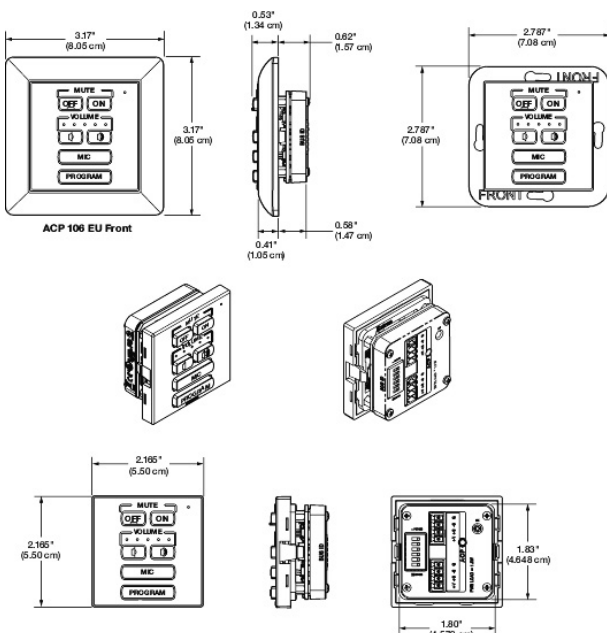ACP CONTROL INTERFACE		
ACP control ports	(2) 3.5 mm captive screw connectors, 4 pole	
ACP pin configuration	+V = +12 VDC; +S = + signal; -S = - signal; G = ground	
Recommended cable type	Extron STP20-2/1000 or STP20-2P/1000 cable	
SOFTWARE CONFIGURATION		
Software	Extron DSP Configurator	
GENERAL		
Power	Power is supplied by an ACP enabled processor or optional power supply	
ACP power consumption	1.5 watts, 12 VDC (Device only)	
Enclosure dimensions		
Plastic faceplate	3.2" H x 3.2" W x 0.4" D (8.1 cm x 8.1 cm x 1 cm)	
Metal mounting plate	2.8" H x 2.8" W x 0.6" D (7.1 cm x 7.1 cm x 1.6 cm) (Fits the opening in a 1-gang EU wallplate)	
Device	1.8" H x 1.8" W x 0.6" D (4.6 cm x 4.6 cm x 1.6 cm) (Depth excludes faceplate and buttons)	
Device and captive screw	1.8" H x 1.8" W x 1" D (4.6 cm x 4.6 cm x 2.6 cm)	
Product weight	0.2 lbs (0.1 kg)	
Regulatory compliance		
Safety	CE, c-UL, UL	
EMI/EMC	CE, C-tick, FCC Class A, ICES, VCCI Class A	
Environmental	Complies with the appropriate requirements of RoHS, WEEE	
Accessibility	Complies with the appropriate requirements of Section 508 of the Rehabilitation Act (29 U.S.C. 794d)	
Warranty	3 years parts and labor	
		
Model	Version Description	Part number
ACP 106 EU	1-Gang EU and Flex55, White, 6 Button	60-1650-03

For complete specifications, please go to www.extron.com
Specifications are subject to change without notice.

WORLDWIDE SALES OFFICES

Anaheim • Raleigh • Silicon Valley • Dallas • New York • Washington, DC • Toronto • Mexico City • Paris • London
Frankfurt • Madrid • Stockholm • Amersfoort • Moscow • Dubai • Johannesburg • Tel Aviv • Sydney • Melbourne
Bangalore • Mumbai • New Delhi • Singapore • Seoul • Shanghai • Beijing • Hong Kong • Tokyo

www.extron.com