


Flex55 112 Mounting Kit • Installation Guide


IMPORTANT:
Go to www.extron.com for the
product specifications.

The Flex55 112 Mounting Kit is a single-opening Flex55 frame supporting either two full-size Flex55 modules or one double-sized Flex55 module, such as the Flex55 AC+USB 130 US power module. The Flex55 112 can be mounted onto two-EU gang junction boxes, Flex55 enclosures, or directly mounted onto furniture, walls or other surfaces.

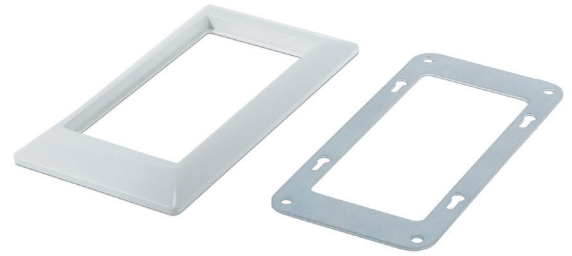

Flex55 Enclosure Mounting


1. Using the four provided wafer screws, secure the mounting bracket onto the compatible Flex55 enclosure, (such as an SMB 212).
2. Place the bezel frame over the mounting bracket.
3. Install the desired Flex55 double module, full modules, half modules, or a combination of full and half modules.
4. Ensure the Flex55 tabs snap to the top and bottom of the bracket. Rotate the modules if necessary.

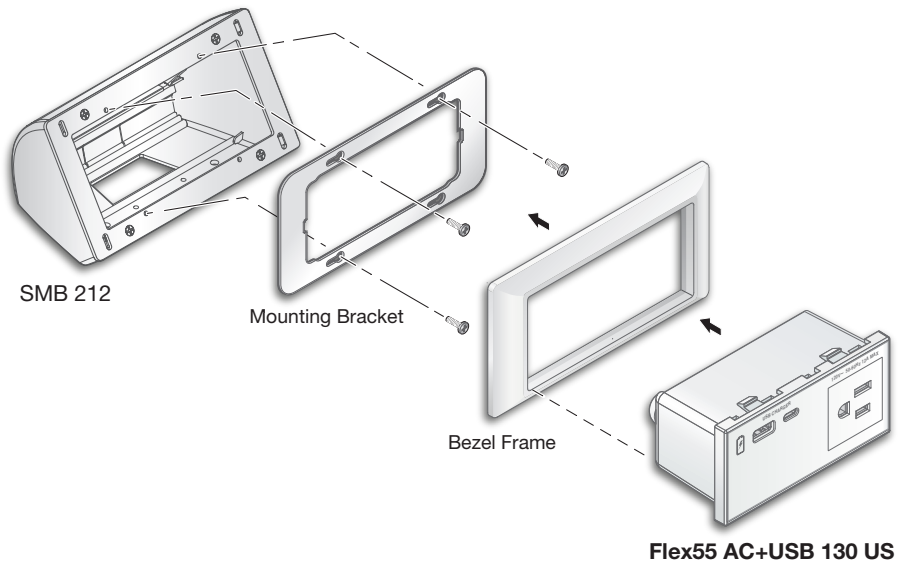

Wall or Furniture Mounting

To mount the kit directly onto a wall, furniture or other surface:


1. Apply the mounting bracket over the desired location and mark the outermost mounting holes onto the surface.
2. Drill pilot holes, if applicable.
3. Secure the mounting bracket using the four provided wood screws or alternate fasteners appropriate for the surface.
4. Position the bezel frame over the mounting bracket.
5. Install the desired Flex55 double module, full modules, half modules, or a combination of full and half modules.
6. Ensure the Flex55 tabs snap to the top and bottom of the bracket. Rotate the modules if necessary.

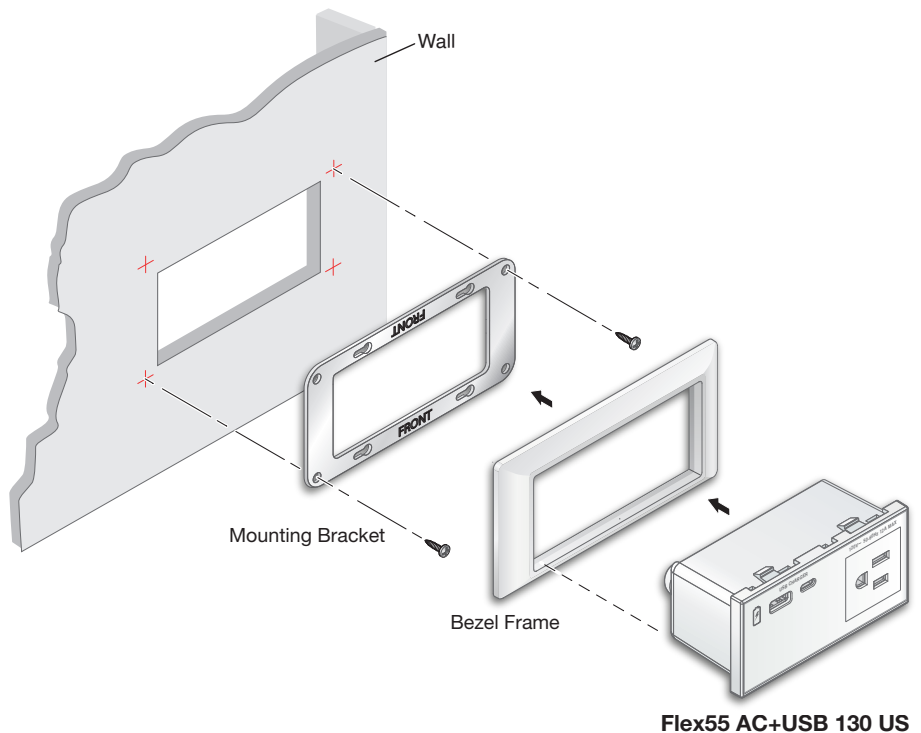

Two-Gang EU Junction Box Mounting

To install the mounting kit onto the EU junction box:


1. Secure the mounting bracket onto the EU junction box using the four provided wafer screws.
2. Place the bezel frame over the mounting bracket
3. Install the desired Flex55 double module, full modules, half modules, or a combination of full and half modules.
4. Ensure the Flex55 tabs snap to the top and bottom of the bracket. Rotate the modules if necessary.

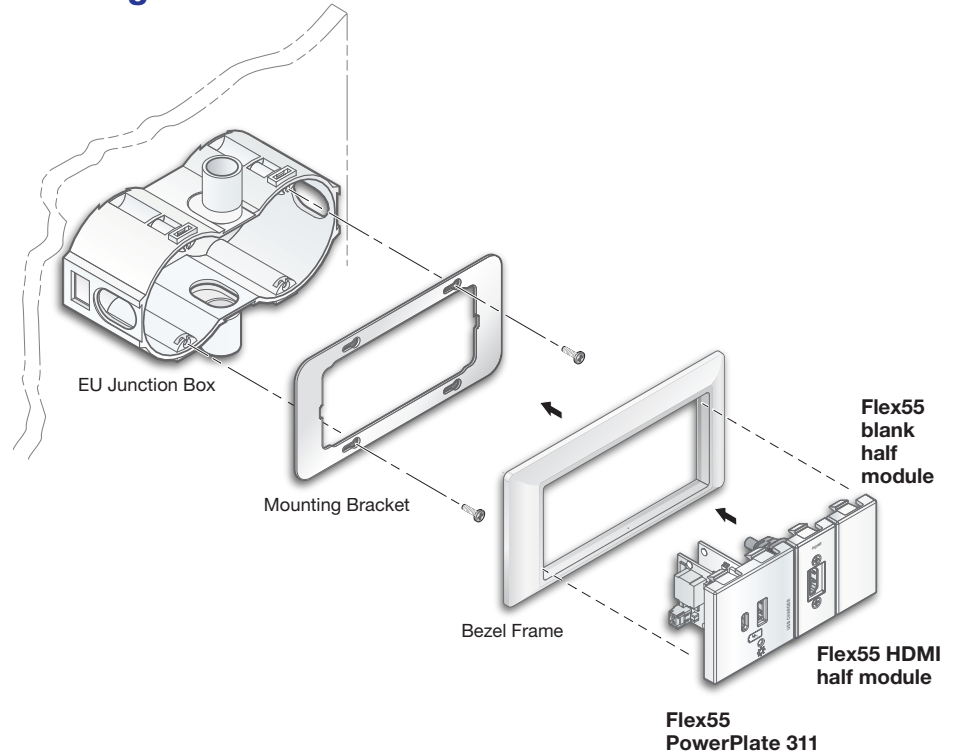

Euro Channel Raceway Junction Box Mounting

To install the mounting kit onto a Euro Channel Raceway junction box:

1. Apply the plastic spacer (if needed) before securing the mounting bracket onto the junction box, using the four provided wafer screws.
2. Place the bezel frame over the mounting bracket
3. Install the desired Flex55 double module, full modules, half modules, or a combination of full modules and half modules.
4. Ensure the Flex55 tabs snap to the top and bottom of the bracket. Rotate the modules if necessary.

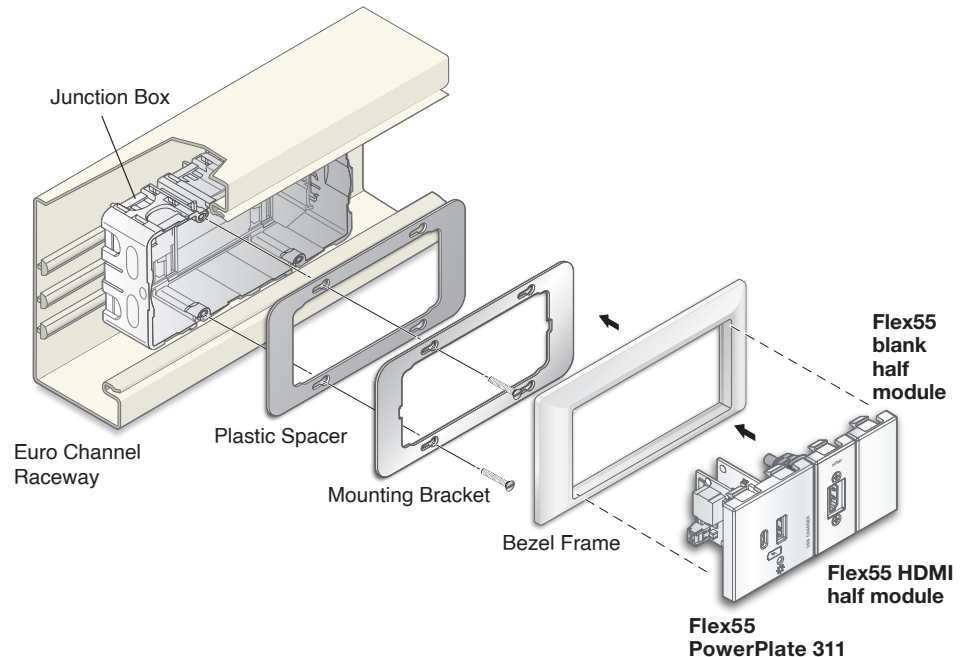

For information on safety guidelines, regulatory compliances, EMI/EMF compatibility, accessibility, and related topics, see the [Extron Safety and Regulatory Compliance Guide](#) on the Extron website.